


스페이스 히터
KSH 시리즈



형명구분도

KSH	-	①	②	
① 정격전압	1 : 110/125VAC	2 : 220/240VAC	3 : 380VAC	
② 출력전력	03 : 30W	05 : 50W	08 : 80W	10 : 100W
	15 : 150W	20 : 200W	30 : 300W	40 : 400W

성능 및 사양

재질	알루미늄, 아노다이즈
접촉면 재질	세라믹 + 터미널
취부 방법	판넬 부착형
절연저항	100MΩ min.(at 500VDC)
내전압	2,000VAC 1분
수명	5,000 시간 (ON/OFF 반복포함)
사용주위온도	-45 to +70°C (무결빙)
사용주위습도	50 ~ 95% RH

제품구분도

정격전압	출력 전력	품명	보호 가드*
110/125VAC	50W	KSH-105	KSH-G3
	80W	KSH-108	
	100W	KSH-110	
	150W	KSH-115	KSH-G2
	200W	KSH-120	
220/240VAC	30W	KSH-203	
	50W	KSH-205	KSH-G3
	80W	KSH-208	
	100W	KSH-210	
	150W	KSH-215	KSH-G2
	200W	KSH-220	
	300W	KSH-230	
	400W	KSH-240	KSH-G1
380VAC	200W	KSH-320	KSH-G2

* 보호가드는 별매품으로 제품에 포함되지 않습니다.

4 Part

소형회로
차단기

퓨즈 &
퓨즈홀더

써지
보호기

음향
신호기

부저류

안전
단자대

고정식·
조립식
단자대

시험
단자대

조립식
커먼
단자대

태양광
시스템

집합
표시등

시그널
타워

히터

온·습도
제어기기

수배전반용
조명등


케이블
그랜드

스페이스 히터

KSH 시리즈

외형치수도

단위 : mm



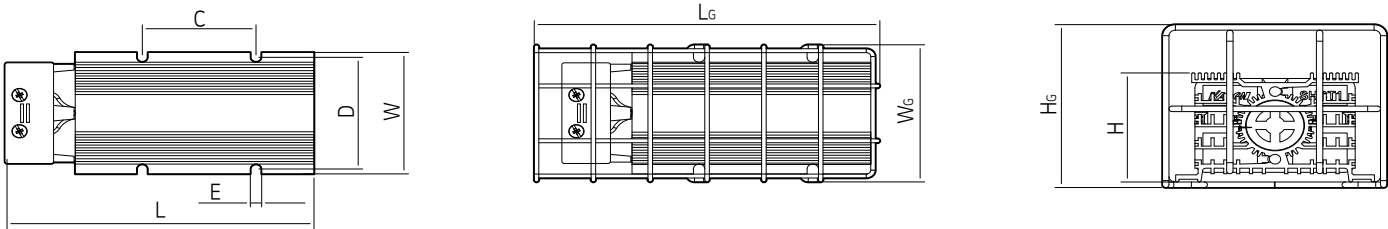


품명	보호가드	출력 전력	몸체			보호가드			취부홀		
			L	W	H	LG	WG	HG	C	D	E
KSH-□03/05	KSH-G3	30W 50W	140	62	42	150	70	65	50	57	Ø5
KSH-□08/10/15/20	KSH-G2	80W 100W 150W 200W	190	62	42	200	70	65	75	57	Ø5
KSH-□30/40	KSH-G1	300W 400W	340	62	42	350	70	65	150	57	Ø5


옵션

KSH-B1


KSH-G1, G2, G3

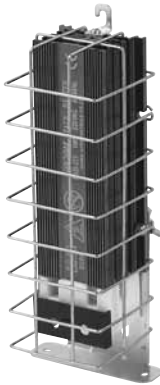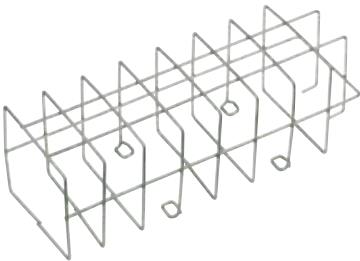

KSH 온도 특성 Data

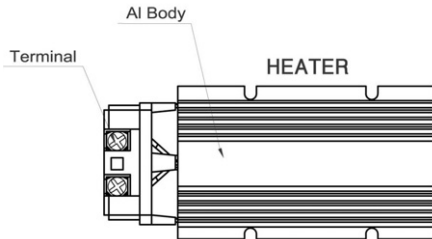


KSH-203 (30W)

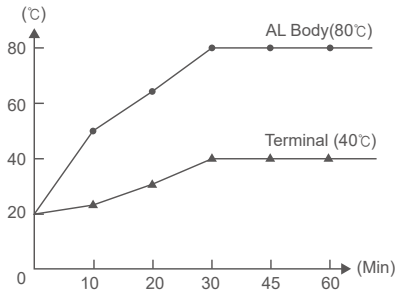


구분	0	10	20	30	45	60
Al Body	20	50	65	80	80	80
Terminal	20	25	30	40	40	40

KSH-205 (50W)

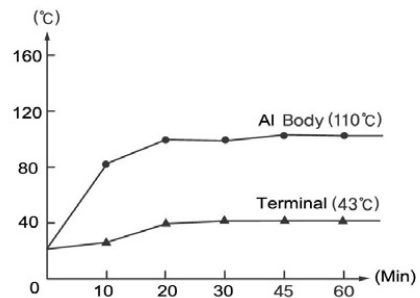


구분	0	10	20	30	45	60
Al Body	20	80	105	110	110	110
Terminal	20	25	40	40	43	43

KSH-210 (100W)

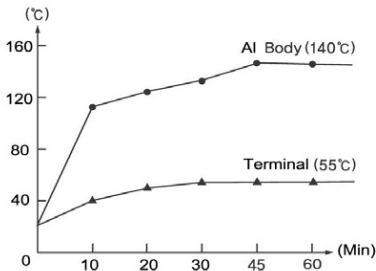


구분	0	10	20	30	45	60
Al Body	20	115	125	140	140	140
Terminal	20	40	50	50	55	55

KSH-215 (150W)

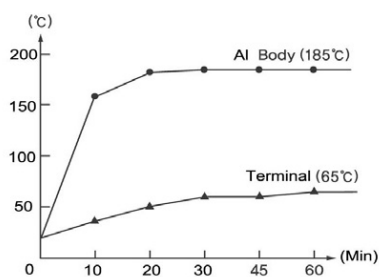


구분	0	10	20	30	45	60
Al Body	20	160	180	185	185	185
Terminal	20	38	50	60	60	65

KSH-220 (200W)

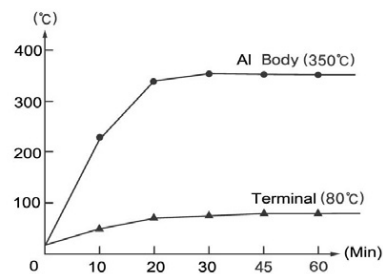

구분	0	10	20	30	45	60
Al Body	20	230	335	350	350	350
Terminal	20	50	70	75	80	80

KSH-240 (400W)

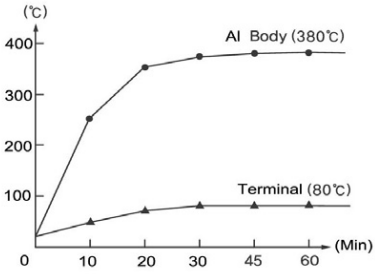

구분	0	10	20	30	45	60
Al Body	20	250	350	370	380	380
Terminal	20	48	70	80	80	80

Rev. 2/14

Data subject may change without notice.

www.kacon.co.kr

Industrial Controls Catalog

IV - 87