

# 시험단자대

KTT 시리즈



## 형명구분도

**KTT** - ① ②



① 극수	03 : 3극	04 : 4극	
② 구분	S : Set(Plug + Consent)	P : Plug	C : Consent

## 성능 및 사양

절연저항	100MΩ min.(at 500VDC)
내전압	2,500VAC 1분간
사용주위온도	-25°C ~ 70°C (-13°F ~ 158°F)
사용주위습도	50% ~ 95% RH

## 외형치수도

단위 : mm

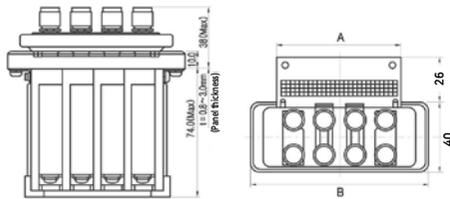

	3P	4P
A	54.8	72.8
B	88	106.8

	3P	4P
C	52	70
D	74.3	93.8

## Front Cover - 조립방법

- ① 노출된 부분을 홈에 삽입한다.
- ② 화살표 부분을 손으로 누르며 밀어 넣는다.

