

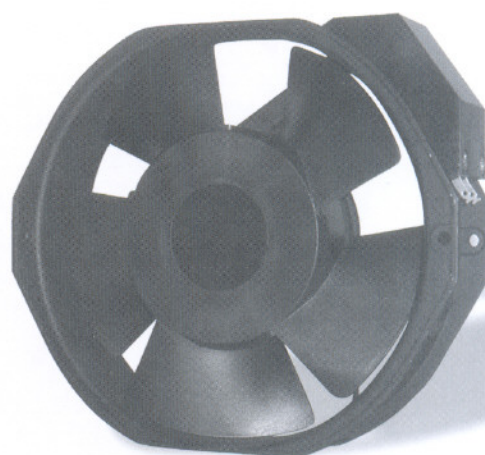
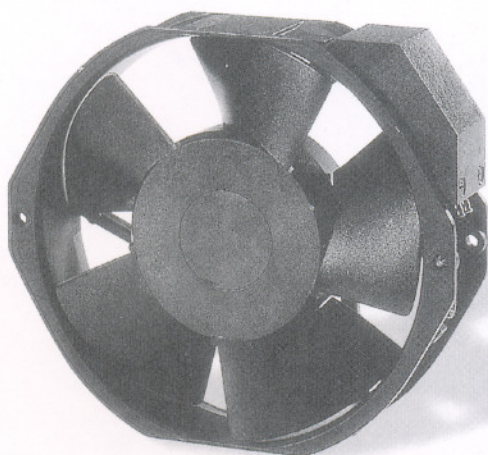
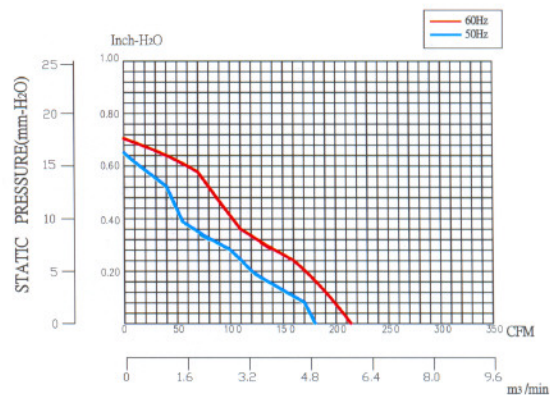


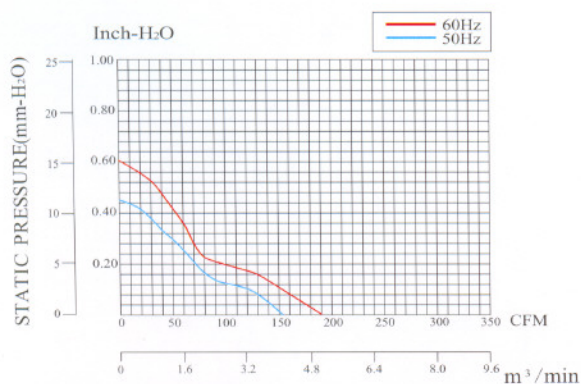

SAN JUN
Suntronix®





172x150x38mm

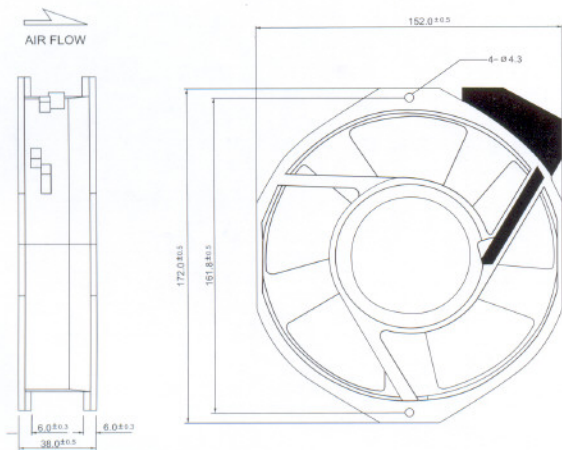

Model	Part No. Terminal Leadwire	Bearing System	Rated Voltage	Freq	Current	Input Power	Speed	Air Flow	Static Pressure	Noise Level	Weight
(型號)	(端子/出綫)	(培林)	(V) (電壓)	(Hz) (頻率)	(A) (電流)	(W) (功率)	(rpm) (轉速)	(CFM) (風量)	(mm-H ₂ O) (靜壓)	(dB-A) (噪聲值)	(g) (重量)
SJ1723HA1	1723HA1BAT(L)	Ball	110/120	50/60	0.35/0.38	26/38	2600/3000	160/190	0.44/0.60	48/53	760
SJ1723HA2	1723HA2BAT(L)	Ball	220/240	50/60	0.18/0.22	30/40	2600/3000	160/190	0.44/0.60	48/53	760
SJ1738HA1	1738HA1BAT(L)	Ball	110/120	50/60	0.24/0.27	26/32	2850/3400	175/220	0.65/0.75	54/58	760
SJ1738HA2	1738HA2BAT(L)	Ball	220/240	50/60	0.11/0.14	32/25	2850/3400	175/220	0.65/0.75	54/58	760

Specifications subject to change without notice.
以上參考數據, 如有變更恕不另行通知。

120x120x38mm

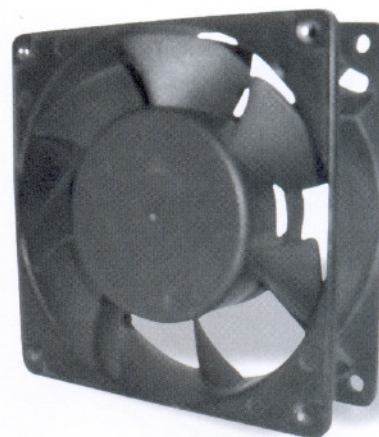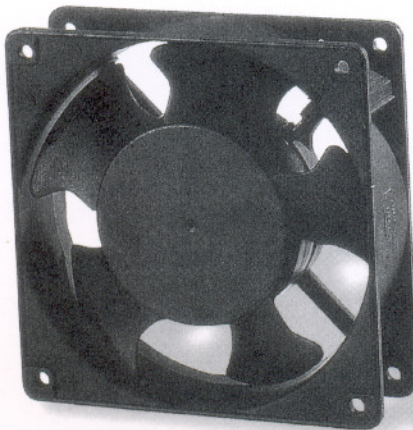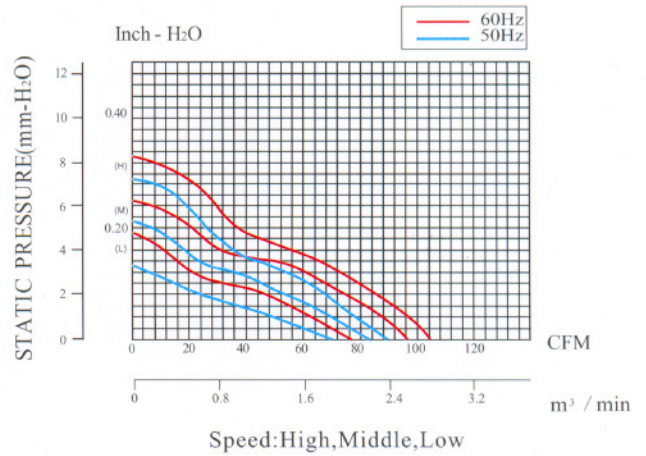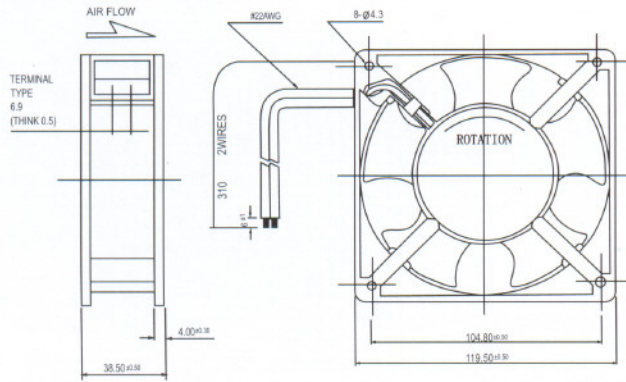


SJ1238-7F



Model	Part No. Terminal Leadwire	Bearing System	Rated Voltage	Freq	Current	Input Power	Air Flow	Static Pressure	Speed	Noise Level	Weight
(型號)	(端子/出線)	(培林)	(V) (電壓)	(Hz) (頻率)	(A) (電流)	(W) (功率)	(CFM) (風量)	(mm-H ₂ O) (靜壓)	(rpm) (轉速)	(dB-A) (線聲值)	(g) (重量)
SJ1238HA1-7F	1238HA1SAT(L) 1238HA1BAT(L)	Sleeve Ball	110/120	50/60	0.21/0.28	16/25	84/100	0.28/0.34	2400/2800	45/51	520
SJ1238HA2-7F	1238HA2SAT(L) 1238HA2BAT(L)	Sleeve Ball	220/240	50/60	0.09/0.12	15/22	84/100	0.28/0.34	2400/2800	45/51	520
SJ1238HA1	1238HA1SAT(L) 1238HA1BAT(L)	Sleeve Ball	110/120	50/60	0.21/0.28	16/25	84/100	0.28/0.34	2600/3000	45/51	520
SJ1238HA2	1238HA2SAT(L) 1238HA2BAT(L)	Sleeve Ball	220/240	50/60	0.09/0.12	15/22	84/100	0.28/0.34	2600/3000	45/51	520
SJ1238MA1	1238MA1SAT(L) 1238MA1BAT(L)	Sleeve Ball	110/120	50/60	0.13/0.17	10/14	80/90	0.18/0.24	2500/2800	39/43	520
SJ1238MA2	1238MA2SAT(L) 1238MA2BAT(L)	Sleeve Ball	220/240	50/60	0.07/0.09	11/16	80/90	0.18/0.24	2500/2800	39/43	520
SJ1238LA1	1238LA1SAT(L) 1238LA1BAT(L)	Sleeve Ball	110/120	50/60	0.10/0.12	9/11	65/78	0.10/0.18	1900/2500	35/40	520
SJ1238LA2	1238LA2SAT(L) 1238LA2BAT(L)	Sleeve Ball	220/240	50/60	0.05/0.06	9/11	65/78	0.10/0.18	1900/2500	35/40	520

Specifications subject to change without notice.
以上參考數據,如有變更恕不另行通知。

120x120x25mm

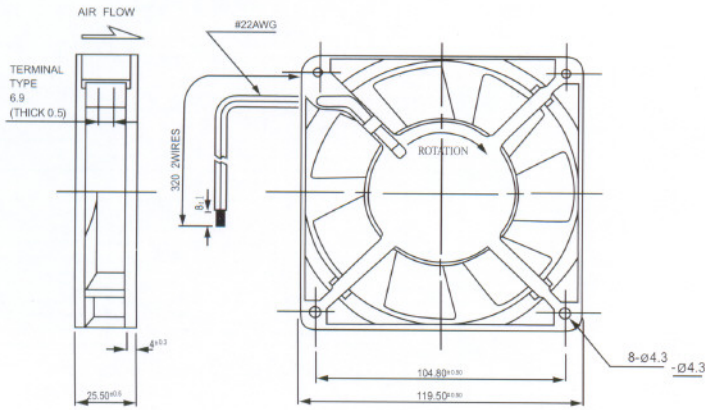

UNITS:mm


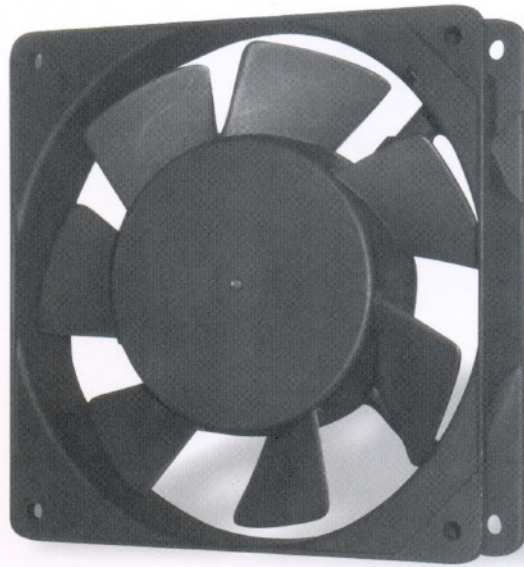
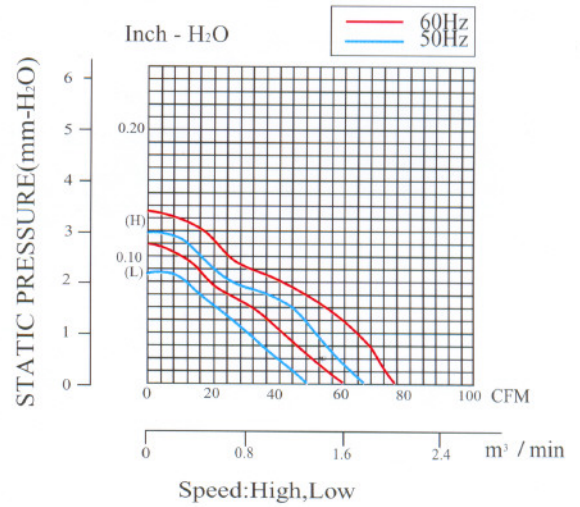


Model	Part No. Terminal Leadwire	Bearing System	Rated Voltage	Freq	Current	Input Power	Air Flow	Static Pressure	Speed	Noise Level	Weight
(型號)	(端子/出線)	(培林)	(V) (電壓)	(Hz) (頻率)	(A) (電流)	(W) (功率)	(CFM) (風量)	(mm-H ₂ O) (靜壓)	(rpm) (轉速)	(dB-A) (噪聲值)	(g) (重量)
SJ1225HA1	1225HA1SAT(L) 1225HA1BAT(L)	Sleeve Ball	110/120	50/60	0.13/0.18	11/18	60/76	0.11/0.14	2300/2800	40/44	338
SJ1225HA2	1238HA2SAT(L) 1238HA2BAT(L)	Sleeve Ball	220/240	50/60	0.07/0.09	14/19	60/76	0.11/0.14	2300/2700	40/44	338
SJ1225LA1	1225LA1SAT(L) 1225LA1BAT(L)	Sleeve Ball	110/120	50/60	0.08/0.11	7/10	50/60	0.08/0.11	2300/2600	33/37	338
SJ1225LA2	1225LA2SAT(L) 1225LA2BAT(L)	Sleeve Ball	220/240	50/60	0.05/0.06	10/13	50/60	0.08/0.11	2100/2400	33/37	338

Specifications subject to change without notice.
以上參考數據, 如有變更恕不另行通知。

120x120x38mm

24 VOLTAGE

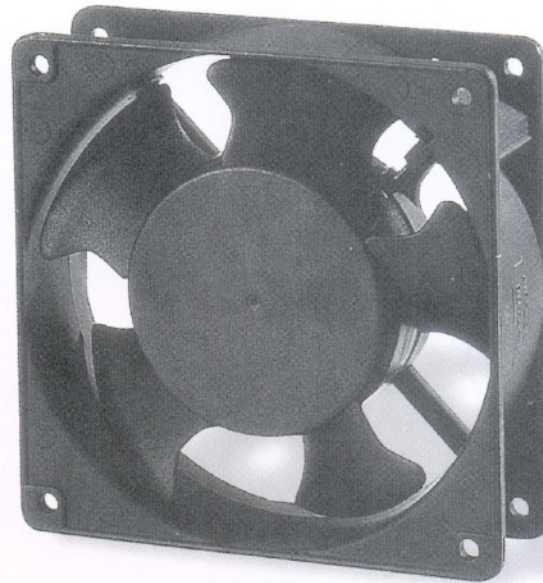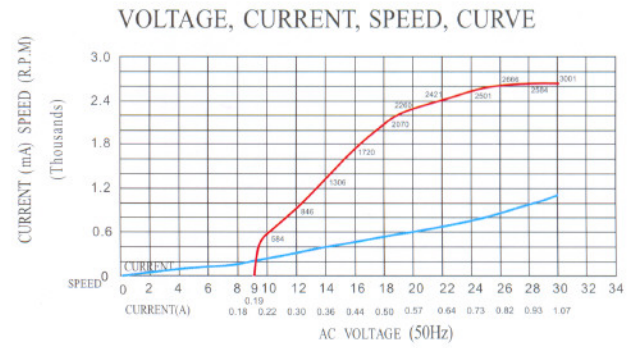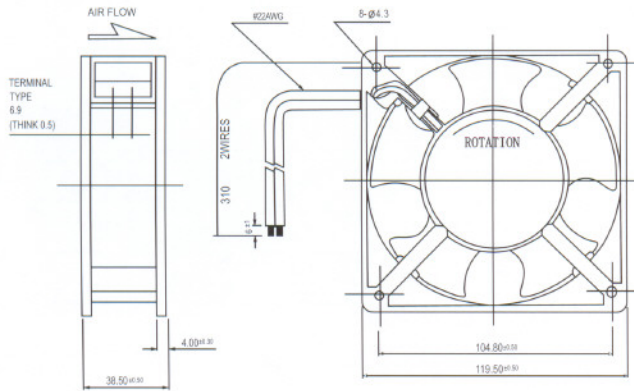

Model	Part No. Terminal Leadwire	Bearing System	Rated Voltage	Freq	Current	Input Power	Speed	Air Flow	Static Pressure	Noise Level	Weight
(型號)	(端子/出線)	(培林)	(V) (電壓)	(Hz) (頻率)	(A) (電流)	(W) (功率)	(rpm) (轉速)	(CFM) (風量)	(mm-H ₂ O) (靜壓)	(dB-A) (噪聲值)	(g) (重量)
SJ1238HA24	1238HA1SAT(L)	Sleeve	24	50/60	0.78/0.92	13/15	2600/2900	85/93	0.13/0.25	36/40	520
	1238HA1BAT(L)	Ball	24	50/60	0.78/0.92	13/15	2600/2900	85/93	0.13/0.25	36/40	520

Specifications subject to change without notice.
以上參考數據,如有變更恕不另行通知。