


ORDERING INFORMATION

SJ 12 38 HA2

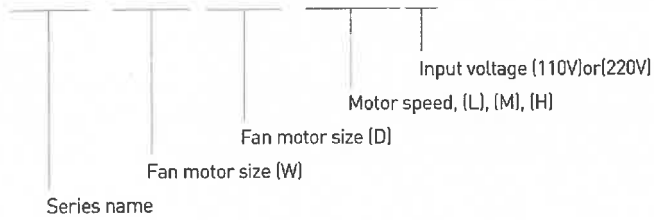

Casting and Impeller Material

- Plastic (UL 94V-0)

Bearing system

- Ball Bearing (B)
- Sleeve Bearing (S)

Life Expectancy

- Ball Bearing (B): 60,000 Hours at 20°c
- Sleeve Bearing (S): 30,000 Hours at 20°c

Approved



AC FAN Motor

MODEL	PART NO. Terminal Leadwire	BEARING SYSTEM	RATED VOLTAGE (V)	Freq (Hz)	AIR FLOW (CFM)	SPEED (rpm)	NOISE LEVEL (dB-A)	DIMENSIONS (mm)
SJ8025HA1	8025HA1SAL	Sleeve	110/120	50/60	26/33	2400/2900	29/33	80x80x25 ✓
	8025HA1BAL	Ball	110/120	50/60	26/33	2400/2900	29/33	
SJ8025HA2	8025HA2SAL	Sleeve	220/240	50/60	26/33	2400/2900	29/33	
	8025HA2BAL	Ball	220/240	50/60	26/33	2400/2900	29/33	
SJ9225HA1	9225HA1SAT	Sleeve	110/120	50/60	40/48	2300/2800	35/37	92x92x25 ✓
	9225HA1BAT	Ball	110/120	50/60	40/48	2300/2800	35/37	
SJ9225HA2	9225HA2SAT	Sleeve	220/240	50/60	40/48	2300/2800	35/37	
	9225HA2BAT	Ball	220/240	50/60	40/48	2300/2800	35/37	
SJ1225HA1	1225HA1SAT	Sleeve	110/120	50/60	60/76	2400/2700	40/44	120x120x25 ✓
	1225HA1BAT	Ball	110/120	50/60	60/76	2400/2700	40/44	
SJ1225HA2	1225HA2SAT	Sleeve	220/240	50/60	60/76	2400/2700	40/44	
	1225HA2BAT	Ball	220/240	50/60	60/76	2400/2700	40/44	
SJ1238HA1	1238HA1SAT	Sleeve	110/120	50/60	105/123	2750/3250	47/49	120x120x38
	1238HA1BAT	Ball	110/120	50/60	105/123	2750/3250	47/49	
SJ1238HA2	1238HA2SAT	Sleeve	220/240	50/60	105/123	2750/3250	47/49	
	1238HA2BAT	Ball	220/240	50/60	105/123	2750/3250	47/49	
SJ1725HA1	1725HA1BAT	Ball	110/220	50/60	210/240	2850/3400	50/57	172x150x51 ✓
SJ1725HA2	1725HA2BAT	Ball	220/240	50/60	210/240	2850/3400	50/57	
SJ1538HA1	1538HA1BAL	Ball	110/120	50/60	84/100	2600/3000	45/51	150x38 ✓
SJ1538HA2	1538HA2BAL	Ball	220/240	50/60	84/100	2600/3000	45/51	
SJ2509HA1	2509HA1BAT	Ball	110/220	50/60	510/600	1450/1850	45/56	250x89
SJ2509HA2	2509HA2BAT	Ball	220/240	50/60	510/600	1450/1850	45/56	

General Information

Switching Mode Power Supply

DC-DC Converter

Noise Filter



Solid State Relay

AC FAN Motor



Power Module

Discrete Semiconductors



SJ8025 EXTERNAL VIEW

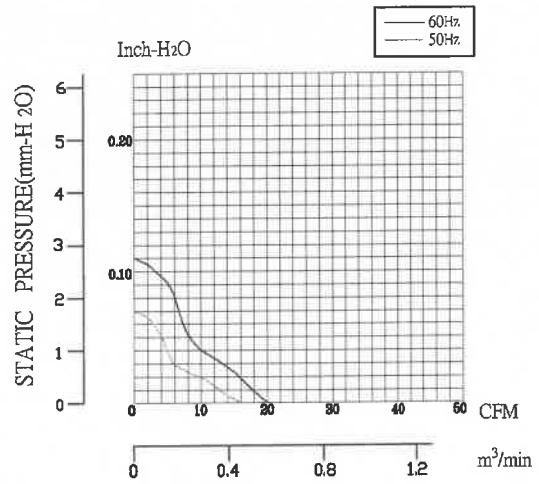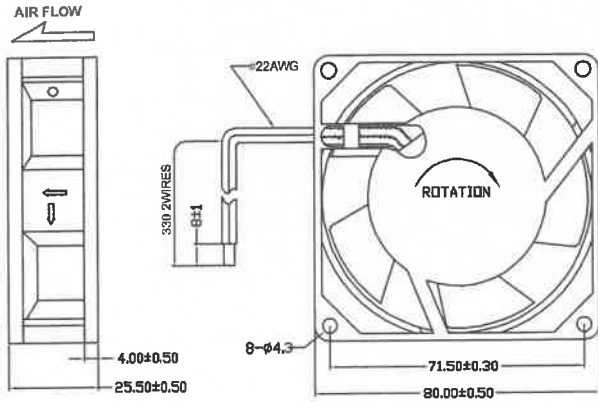



SJ9225 EXTERNAL VIEW

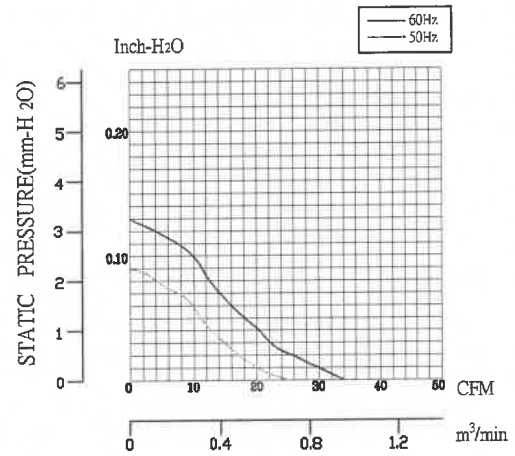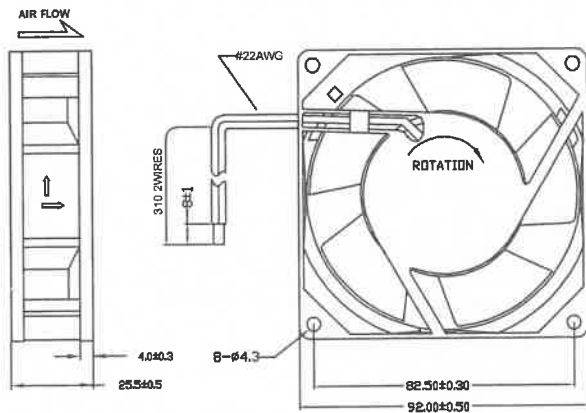



SJ1225 EXTERNAL VIEW

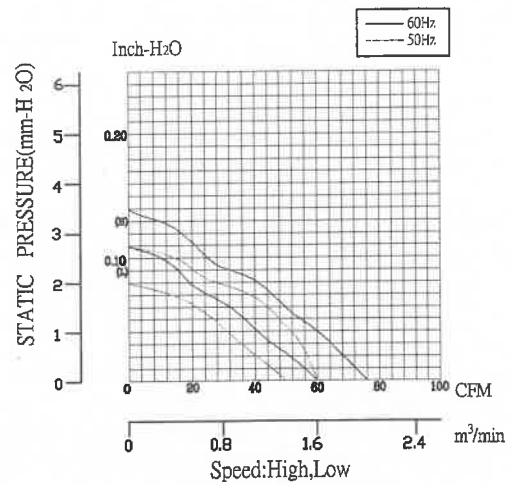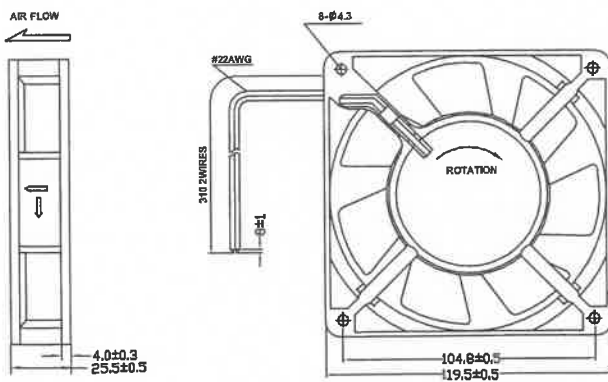



SJ1238 EXTERNAL VIEW

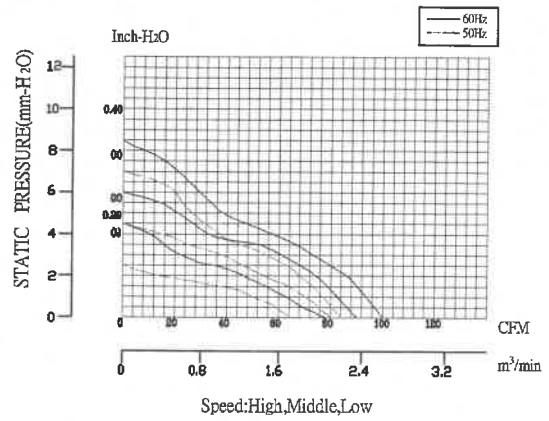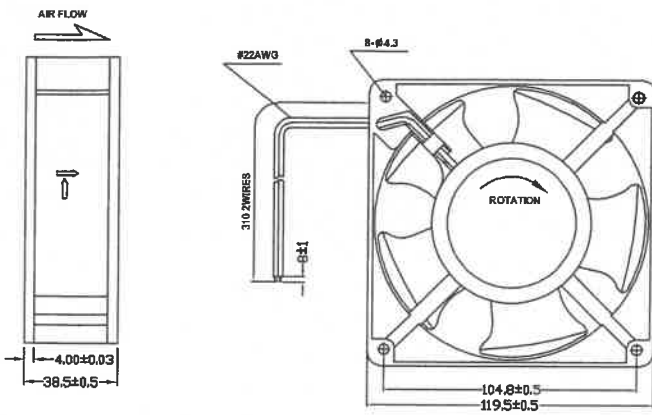

SJ1725 EXTERNAL VIEW

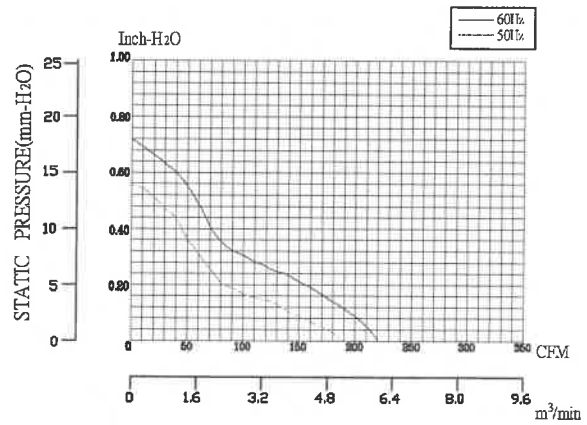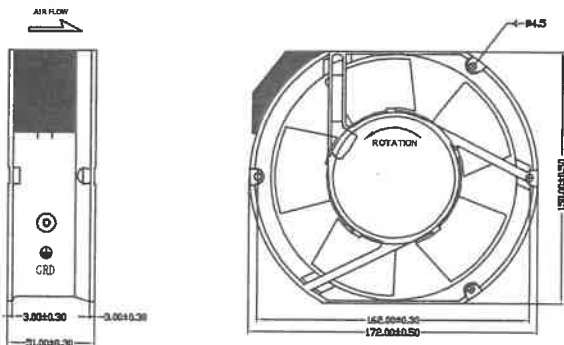

SJ1538 EXTERNAL VIEW

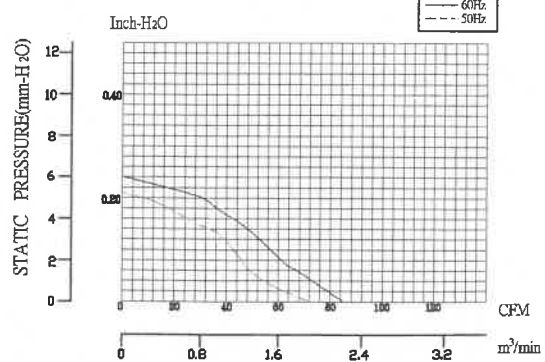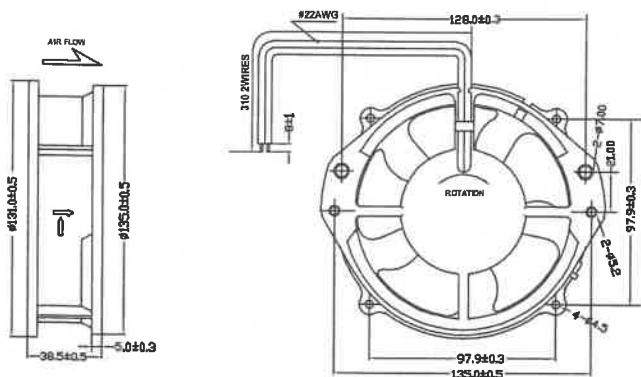

General Information

Switching Mode Power Supply

DC-DC Converter

Noise Filter

Solid State Relay

AC FAN Motor

Power Module

Discrete Semiconductors

SJ2509 EXTERNAL VIEW

